



Zalman VE-300 firmware Update

1. Install suitable 2.5" Hard Drive; connect via USB to host PC.
2. Go to Computer | Manage | Disc management; Create Partition and Format as NTFS **Primary** and **Active**.

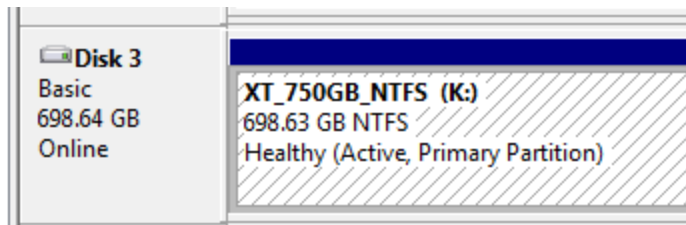

3. Reboot (Refresh) the Zalman VE-300 – Hold in the jog dial for 5 seconds until it enters the Menu.
4. Scroll down 3 steps to USB Connect. Press jog dial. Press **Refresh**.
5. Device displays **Data Saving**, then **Please Wait** and then reboots.
6. It should now correctly show the **Folder** icon but still will not display .iso filenames.
7. Download new [latest firmware](#) from the Zalman website. This is the NTFS toolkit. [There is also an alternative if you want to run exFAT or FAT32]. There is a change log on the site showing the revisions in each firmware version.
8. Unzip and then run the ZMVE-300_user_fw_writer_02(R915N)_x86.exe

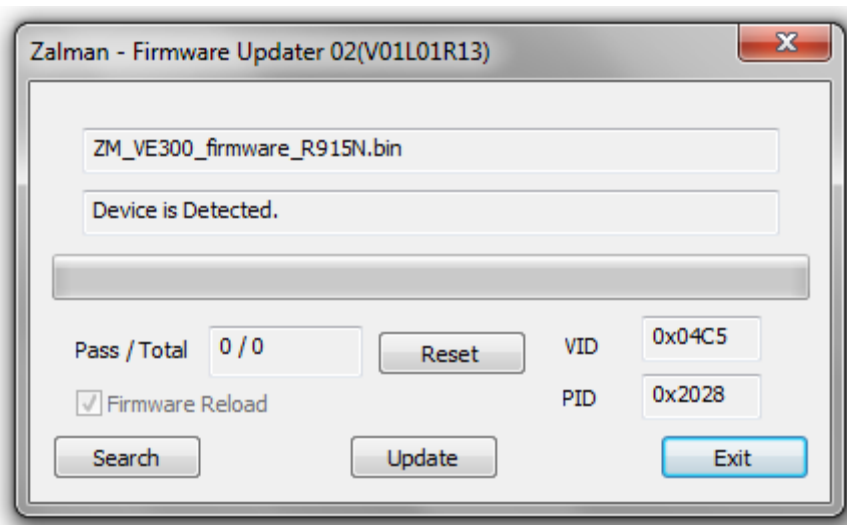

9. The device will then reboot.
10. Repeat steps 3 to 5.
11. You should now be able to scroll through .iso files contained in the _iso Folder.
12. Press jog dial to mount drive – should then open whatever software DVD Player is set as default and play the media.